


## Your Art is safe with the Merlin Light<sup>®</sup>

UV Output for Merlin Projector Lights			
Lamp	Distance to Art	UV output from Merlin Projector	Maximum levels of UV allowed by Museum Curators on sensitive artwork
70W CMH	5 ft	2.2 $\mu\text{W}/\text{cm}^2$	4.5 $\mu\text{W}/\text{cm}^2$
	10 ft	0.1 $\mu\text{W}/\text{cm}^2$	1.125 $\mu\text{W}/\text{cm}^2$
	15 ft	0 $\mu\text{W}/\text{cm}^2$	0.375 $\mu\text{W}/\text{cm}^2$
150W CMH	5 ft	9.2 $\mu\text{W}/\text{cm}^2$	10.5 $\mu\text{W}/\text{cm}^2$
	10 ft	1.3 $\mu\text{W}/\text{cm}^2$	2.625 $\mu\text{W}/\text{cm}^2$
	15 ft	0.1 $\mu\text{W}/\text{cm}^2$	1.125 $\mu\text{W}/\text{cm}^2$
250W Halogen	5 ft	0.8 $\mu\text{W}/\text{cm}^2$	4.5 $\mu\text{W}/\text{cm}^2$
	10 ft	0 $\mu\text{W}/\text{cm}^2$	1.125 $\mu\text{W}/\text{cm}^2$
	15 ft	0 $\mu\text{W}/\text{cm}^2$	.375 $\mu\text{W}/\text{cm}^2$

Microwatts per centimeter squared ( $\mu\text{W}/\text{cm}^2$ )

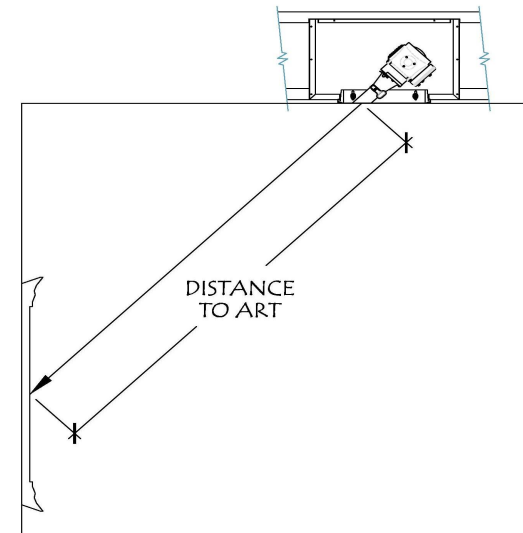

652 W. Confluence Ave  
Murray, UT. 84123  
385-743-3333 Fax 385-743-3334  
www.glenncoinc.com  
Copyright Protected. GlennCo INC. 2006

Manufactured by  
**GLENN CO. INC.**  
PROJECTOR LIGHTING TECH SUPPORT/INSTALLATION